



Product Specification

G170EG01 V1

AU OPTRONICS CORPORATION

☐ Preliminary Specification

☒ Final Specification

Module	17.0" SXGA Color TFT-LCD Module
Model Name	G170EG01 V1



Customer	Date
Approved by	
Note: This Specification is subject to change without notice.	

Approved by	Date
<u>Flossie Chuang</u>	<u>2019/04/24</u>
Prepared by	
<u>Athena Wu</u>	<u>2019/04/24</u>
General Display Business Unit/ AU Optronics corporation	

Contents

1. Handling Precautions	6
2. General Description	7
2.1 Display Characteristics	7
2.2 Optical Characteristics	8
3. Functional Block Diagram	12
4. Absolute Maximum Ratings	13
4.1 TFT LCD Module	13
4.2 Backlight Unit	13
4.3 Absolute Ratings of Environment	13
5. Electrical characteristics	14
5.1 TFT LCD Module	14
5.2 Backlight Unit	16
6. Signal Characteristic	17
6.1 Pixel Format Image	17
6.2 The Input Data Format	17
6.3 Signal Description	18
6.4 Timing Characteristics	20
6.5 Power ON/OFF Sequence	21
7. Connector & Pin Assignment	22
7.1 TFT LCD Module	22
7.2 Backlight Unit	23
8. Reliability Test	24
9. Label and Packaging	24
9.1 Shipping Label (on the rear side of TFT-LCD display)	25
9.2 Backlight Label	25
9.3 Carton Package	25
9.4 Palletizing	27
10. Mechanical Characteristics	28

Record of Revision

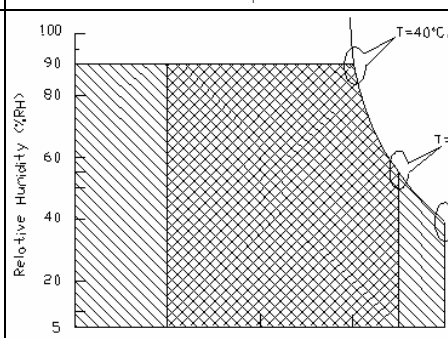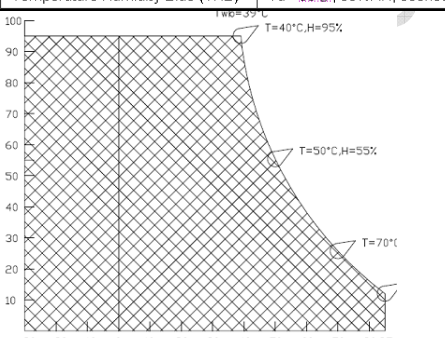Version and Date	Page	Old description	New Description	Remark																																				
0.1 2011/01/12	All	First Edition for Customer	All																																					
0.2 2011/01/14	5	350 (center,Typ)@7.5 mA	350																																					
	24	<table><tr><th>Items</th><th>Required Condition</th></tr><tr><td>Temperature Humidity Bias (THB)</td><td>Ta= 50°C , 90%RH, 300hours</td></tr></table>	Items	Required Condition	Temperature Humidity Bias (THB)	Ta= 50°C , 90%RH, 300hours	<table><tr><th>Items</th><th>Required Condition</th></tr><tr><td>Temperature Humidity Bias (THB)</td><td>Ta= 50°C , 80%RH, 300hours</td></tr></table>	Items	Required Condition	Temperature Humidity Bias (THB)	Ta= 50°C , 80%RH, 300hours																													
Items	Required Condition																																							
Temperature Humidity Bias (THB)	Ta= 50°C , 90%RH, 300hours																																							
Items	Required Condition																																							
Temperature Humidity Bias (THB)	Ta= 50°C , 80%RH, 300hours																																							
0.3 2011/01/24	11																																							
	26	Thickness= 15.8 mm	Thickness= 18.0 mm																																					
0.4 2011/04/06	5, 6	Optical ResponseTime= 5 ms	Optical ResponseTime= 30 ms																																					
	5	This module does not contain an inverter card for backlight.	This module embeds an LED driver on it.																																					
	5	Weight: 1800 (g) Typ.	Weight: 1350 (g) Typ.																																					
	11	<table><tr><th colspan="6">4.2 Backlight Unit</th></tr><tr><th>Item</th><th>Symbol</th><th>Min</th><th>Max</th><th>Unit</th><th>Conditions</th></tr><tr><td>LED Current</td><td>ICFL</td><td>-</td><td>110</td><td>[mA]</td><td>Note 1, 2</td></tr></table>	4.2 Backlight Unit						Item	Symbol	Min	Max	Unit	Conditions	LED Current	ICFL	-	110	[mA]	Note 1, 2	<table><tr><th colspan="6">4.2 Backlight Unit</th></tr><tr><th>Item</th><th>Symbol</th><th>Min</th><th>Max</th><th>Unit</th><th>Conditions</th></tr><tr><td>LED Forward Current</td><td>I_f</td><td>-</td><td>120</td><td>[mA]</td><td>Note 1, 2</td></tr></table>	4.2 Backlight Unit						Item	Symbol	Min	Max	Unit	Conditions	LED Forward Current	I _f	-	120	[mA]	Note 1, 2	
4.2 Backlight Unit																																								
Item	Symbol	Min	Max	Unit	Conditions																																			
LED Current	ICFL	-	110	[mA]	Note 1, 2																																			
4.2 Backlight Unit																																								
Item	Symbol	Min	Max	Unit	Conditions																																			
LED Forward Current	I _f	-	120	[mA]	Note 1, 2																																			
	23	No pins drawing of LED driver board	New add pins drawing																																					
1.0 2011/09/30	6	Without RGB color coordinate	<table><tr><td>Red x_o</td><td>0.598</td><td>0.648</td><td>0.698</td></tr><tr><td>Red y_o</td><td>0.289</td><td>0.339</td><td>0.389</td></tr><tr><td>Green x_o</td><td>0.273</td><td>0.323</td><td>0.373</td></tr><tr><td>Green y_o</td><td>0.563</td><td>0.613</td><td>0.663</td></tr><tr><td>Blue x_o</td><td>0.093</td><td>0.143</td><td>0.193</td></tr><tr><td>Blue y_o</td><td>0.020</td><td>0.070</td><td>0.120</td></tr></table>	Red x _o	0.598	0.648	0.698	Red y _o	0.289	0.339	0.389	Green x _o	0.273	0.323	0.373	Green y _o	0.563	0.613	0.663	Blue x _o	0.093	0.143	0.193	Blue y _o	0.020	0.070	0.120													
Red x _o	0.598	0.648	0.698																																					
Red y _o	0.289	0.339	0.389																																					
Green x _o	0.273	0.323	0.373																																					
Green y _o	0.563	0.613	0.663																																					
Blue x _o	0.093	0.143	0.193																																					
Blue y _o	0.020	0.070	0.120																																					
	6	<table><tr><td>Contrast Ratio</td><td>-</td><td>-</td><td>600</td><td>1000</td><td>-</td><td>4</td></tr></table>	Contrast Ratio	-	-	600	1000	-	4	<table><tr><td>Contrast Ratio</td><td>-</td><td>-</td><td>600</td><td>800</td><td>-</td><td>4</td></tr></table>	Contrast Ratio	-	-	600	800	-	4																							
Contrast Ratio	-	-	600	1000	-	4																																		
Contrast Ratio	-	-	600	800	-	4																																		
	24	Without EMI item is RA list	<table><tr><td>EMI</td><td>30-230 MHz, limit 40 dBu V/m, 230-1000 MHz, limit 47 dBu V/m</td></tr></table>	EMI	30-230 MHz, limit 40 dBu V/m, 230-1000 MHz, limit 47 dBu V/m																																			
EMI	30-230 MHz, limit 40 dBu V/m, 230-1000 MHz, limit 47 dBu V/m																																							
	25	Outside dimension of carton:434(L)mm*278(W)mm*390(H)mm	Outside dimension of carton:426(L)mm*270(W)mm*375(H)mm																																					
1.1 2012/02/01	5	Operation temperature -30 to +85	Operation temperature -30 to +70																																					
1.2 2012/05/25	6	No Color Gamut spec	Add Color Gamut 72%																																					
1.3 2012/07/12		Change View Angle Spec & Delete	Change View Angle spec(CR=10) & Delete																																					

		View Angle spec(CR=5)	View Angle spec(CR=5) Typ. From L85/R85/U80/D80 to L80/R80/U60/D80 Min From L70/R70/U70/D70 to L70/R70/U50/D70	
1.4 2013/6/24	6	Operation temperature -30 to +70	Operation temperature -30 to +85	
	25	9.2 Carton Package Max capacity : 8 TFT-LCD module per carton Max weight: 14 kg per carton Outside dimension of carton: 426(L)mm*270(W)mm*375(H)mm	9.2 Carton Package Max capacity : 8 TFT-LCD module per carton Max weight: 18 kg per carton Outside dimension of carton: 434(L)mm*278(W)mm*391(H)mm	
	26	No palletizing info	Add palletizing info	
1.5 2013/11/13	7	Change View Angle Spec	Change View Angle spec. (CR=10) Typ.from L80/R80/U60/D80 to L80/R80/U60/D70 Min from L70/R70/U50/D70 to L70/R70/U50/D60	
1.6 2014/6/6	6	White Luminance [cd/m2] 350	White Luminance [cd/m2] 350 (Typ.)	
	7	Color Gamut	NTSC	
	11		Update Functional Block Diagram	
	12		Add signal voltage information	
	12		Add note3 information	
	13		Update Power Specification description	
	14		Update Signal Electrical Characteristics table & waveform	
	17,18		Update signal description naming	
	19		Update timing diagram	
	21		Update pin assignment	
	22		Update Signal for LED driver connector table	
	24		Update shipping label & backlight label drawing	
	25		Update Carton Package drawing	
	27, 28		Update mechanical drawing	
1.7 2014/9/1	7	Change View Angle Spec	Change View Angle spec. (CR=10) Typ.from L80/R80/U60/D70 to	



Product Specification

G170EG01 V1

AU OPTRONICS CORPORATION

			L80/R80/U60/D80 Min from L70/R70/U50/D60 to L70/R70/U50/D70																																																																																															
	25		Update shipping label																																																																																															
1.8 2017/6/19	16	<table><tr><th>Symbol</th><th>Parameter</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Unit</th></tr><tr><td>V_{LED}</td><td>Input Voltage</td><td>10.8</td><td>12</td><td>12.6</td><td>Volt</td></tr><tr><td>I_{LED}</td><td>Input Current</td><td>-</td><td>1.18</td><td>-</td><td>A</td></tr><tr><td>P_{LED}</td><td>Power Consumption</td><td>-</td><td>14.16</td><td>-</td><td>Watt</td></tr><tr><td>I_{INRUSH LED}</td><td>Inrush Current</td><td>-</td><td>-</td><td>5.1</td><td>A</td></tr><tr><td>F_{PWM}</td><td>PWM Dimming Frequency</td><td>200</td><td>-</td><td>20K</td><td>Hz</td></tr><tr><td rowspan="2">V_{PWM DIM}</td><td>Swing Voltage High</td><td>4.5</td><td>5.0</td><td>5.5</td><td>Volt</td></tr><tr><td>Swing Voltage Low</td><td>-</td><td>-</td><td>0.8</td><td>Volt</td></tr></table>	Symbol	Parameter	Min.	Typ.	Max.	Unit	V _{LED}	Input Voltage	10.8	12	12.6	Volt	I _{LED}	Input Current	-	1.18	-	A	P _{LED}	Power Consumption	-	14.16	-	Watt	I _{INRUSH LED}	Inrush Current	-	-	5.1	A	F _{PWM}	PWM Dimming Frequency	200	-	20K	Hz	V _{PWM DIM}	Swing Voltage High	4.5	5.0	5.5	Volt	Swing Voltage Low	-	-	0.8	Volt	<table><tr><th>Symbol</th><th>Parameter</th><th>Min.</th><th>Typ.</th><th>Max.</th><th>Unit</th></tr><tr><td>V_{LED}</td><td>Input Voltage</td><td>10.8</td><td>12</td><td>12.6</td><td>Volt</td></tr><tr><td>I_{LED}</td><td>Input Current</td><td>-</td><td>1.18</td><td>-</td><td>A</td></tr><tr><td>P_{LED}</td><td>Power Consumption</td><td>-</td><td>14.16</td><td>-</td><td>Watt</td></tr><tr><td>I_{INRUSH LED}</td><td>Inrush Current</td><td>-</td><td>-</td><td>5.1</td><td>A</td></tr><tr><td>F_{PWM}</td><td>PWM Dimming Frequency</td><td>200</td><td>-</td><td>20K</td><td>Hz</td></tr><tr><td rowspan="2">V_{PWM DIM}</td><td>Swing Voltage High</td><td>4.0</td><td>5.0</td><td>5.5</td><td>Volt</td></tr><tr><td>Swing Voltage Low</td><td>-</td><td>-</td><td>0.8</td><td>Volt</td></tr></table>	Symbol	Parameter	Min.	Typ.	Max.	Unit	V _{LED}	Input Voltage	10.8	12	12.6	Volt	I _{LED}	Input Current	-	1.18	-	A	P _{LED}	Power Consumption	-	14.16	-	Watt	I _{INRUSH LED}	Inrush Current	-	-	5.1	A	F _{PWM}	PWM Dimming Frequency	200	-	20K	Hz	V _{PWM DIM}	Swing Voltage High	4.0	5.0	5.5	Volt	Swing Voltage Low	-	-	0.8	Volt	
		Symbol	Parameter	Min.	Typ.	Max.	Unit																																																																																											
		V _{LED}	Input Voltage	10.8	12	12.6	Volt																																																																																											
		I _{LED}	Input Current	-	1.18	-	A																																																																																											
		P _{LED}	Power Consumption	-	14.16	-	Watt																																																																																											
		I _{INRUSH LED}	Inrush Current	-	-	5.1	A																																																																																											
		F _{PWM}	PWM Dimming Frequency	200	-	20K	Hz																																																																																											
		V _{PWM DIM}	Swing Voltage High	4.5	5.0	5.5	Volt																																																																																											
			Swing Voltage Low	-	-	0.8	Volt																																																																																											
		Symbol	Parameter	Min.	Typ.	Max.	Unit																																																																																											
V _{LED}	Input Voltage	10.8	12	12.6	Volt																																																																																													
I _{LED}	Input Current	-	1.18	-	A																																																																																													
P _{LED}	Power Consumption	-	14.16	-	Watt																																																																																													
I _{INRUSH LED}	Inrush Current	-	-	5.1	A																																																																																													
F _{PWM}	PWM Dimming Frequency	200	-	20K	Hz																																																																																													
V _{PWM DIM}	Swing Voltage High	4.0	5.0	5.5	Volt																																																																																													
	Swing Voltage Low	-	-	0.8	Volt																																																																																													

1. Handling Precautions

- 1) Since front polarizer is easily damaged, pay attention not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- 5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open or modify the Module Assembly.
- 8) Do not press the reflector sheet at the back of the module to any directions.
- 9) In case if a Module has to be put back into the packing container slot after once it was taken out from the container, do not press the center of the LED light bar edge. Instead, press at the far ends of the LED light bar edge softly. Otherwise the TFT Module may be damaged
- 10) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 11) After installation of the TFT Module into an enclosure, do not twist nor bend the TFT Module even momentary. At designing the enclosure, it should be taken into consideration that no bending/twisting forces are applied to the TFT Module from outside. Otherwise the TFT Module may be damaged.
- 12) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950-1 or UL1950-1), or be applied exemption

2. General Description

This specification applies to the 17 inch Color TFT-LCD Module G170EG01 V1.

The display supports the SXGA (1280(H) x 1024(V)) screen format and 16.7M colors (RGB 6-bits+Hi-FRC data).All input signals are 2 Channel LVDS interface compatible.

This module embbededs an LED driver on it.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

Items	Unit	Specifications
Screen Diagonal	[mm]	432 (17.0")
Active Area	[mm]	337.920(H) x 270.336(V)
Pixels H x V		1280 x 3(RGB) x 1024
Pixel Pitch	[mm]	0.264(per one triad) x 0.264
Pixel Arrangement		R.G.B. Vertical Stripe
Display Mode		Normally White
White Luminance	[cd/m2]	350 (Typ)
Contrast Ratio		800 : 1 (Typ)
Optical ResponseTime	[msec]	30 (Typ)
Nominal Input Voltage VDD	[Volt]	+5.0 (Typ)
Power Consumption (VDD line + LED line)	[Watt]	22 W (Typ.) (with LED driver, all black pattern)
Weight	[Grams]	1350 Typ.
Physical Size (H x V x D)	[mm]	358.5(H) x 296.5(V) Typ. x 18.0(D) Max
Electrical Interface		Dual Channel LVDS
Surface Treatment		Anti-glare type, Hardness 3H
Support Color		16.7M colors (RGB 6-bits +Hi-FRC data)
Temperature Range		
Operating	[°C]	-30 to +85
Storage (Non-Operating)	[°C]	-30 to +85
RoHS Compliance		RoHS Compliance

2.2 Optical Characteristics


The optical characteristics are measured under stable conditions at 25°C (Room Temperature):

Item	Unit	Conditions	Min.	Typ.	Max.	Note
Viewing Angle	[degree]	Horizontal (Right) CR = 10 (Left)	70 70	80 80	-	1
		Vertical (Up) CR = 10 (Down)	50 70	60 80	-	
Luminance Uniformity	[%]	9 Points	75	80	-	2, 3
Optical Response Time	[msec]	Rising	-	20	25	6
		Falling	-	10	15	
		Rising + Falling	-	30	40	
Color / Chromaticity Coordinates (CIE 1931)		Red x	0.598	0.648	0.698	4
		Red y	0.289	0.339	0.389	
		Green x	0.273	0.323	0.373	
		Green y	0.563	0.613	0.663	
		Blue x	0.093	0.143	0.193	
		Blue y	0.020	0.070	0.120	
		White x	0.263	0.313	0.363	
		White y	0.279	0.329	0.379	
White Luminance (At LED= 110mA)	[cd/m ²]		280	350	-	4
Contrast Ratio			600	800	-	4
Cross Talk (At 75Hz)	[%]		-	-	1.5	5
Flicker	[dB]		-	-	-20	7
NTSC	[%]			72		


Optical Equipment: BM-5A, BM-7, PR880, or equivalent

Note 1: Definition of viewing angle

Viewing angle is the measurement of contrast ratio ≥ 10 , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as follows; 90° (θ) horizontal left and right and 90° (ϕ) vertical, high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated about its center to develop the desired measurement viewing angle.

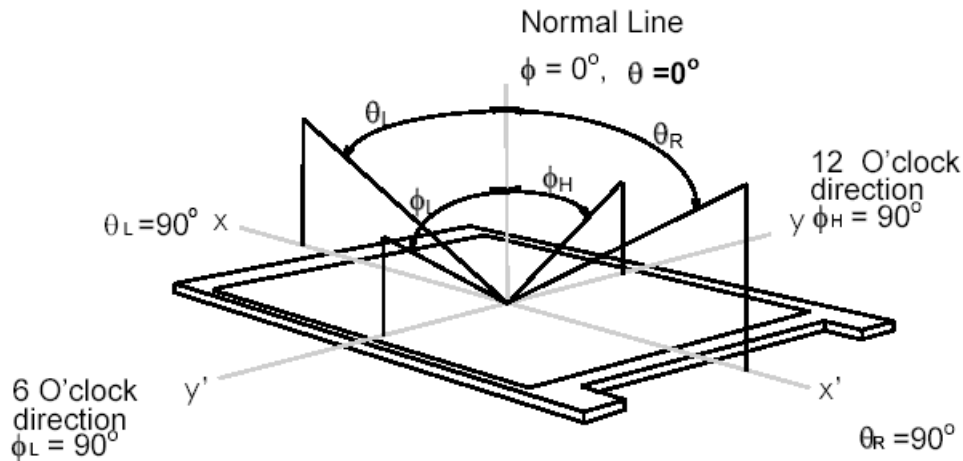

Note 2: 9 points position

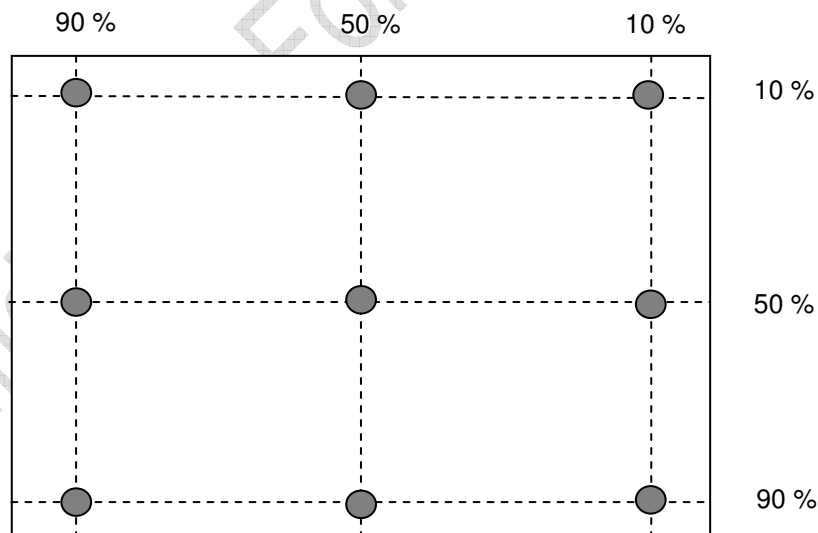


Note 3: The luminance uniformity of 9 points is defined by dividing the maximum luminance values by the minimum test point luminance

$$\delta_{w9} = \frac{\text{Minimum Luminance of 9 points}}{\text{Maximum Luminance of 9 points}}$$

Note 4: Measurement method

The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a stable, windless and dark room.

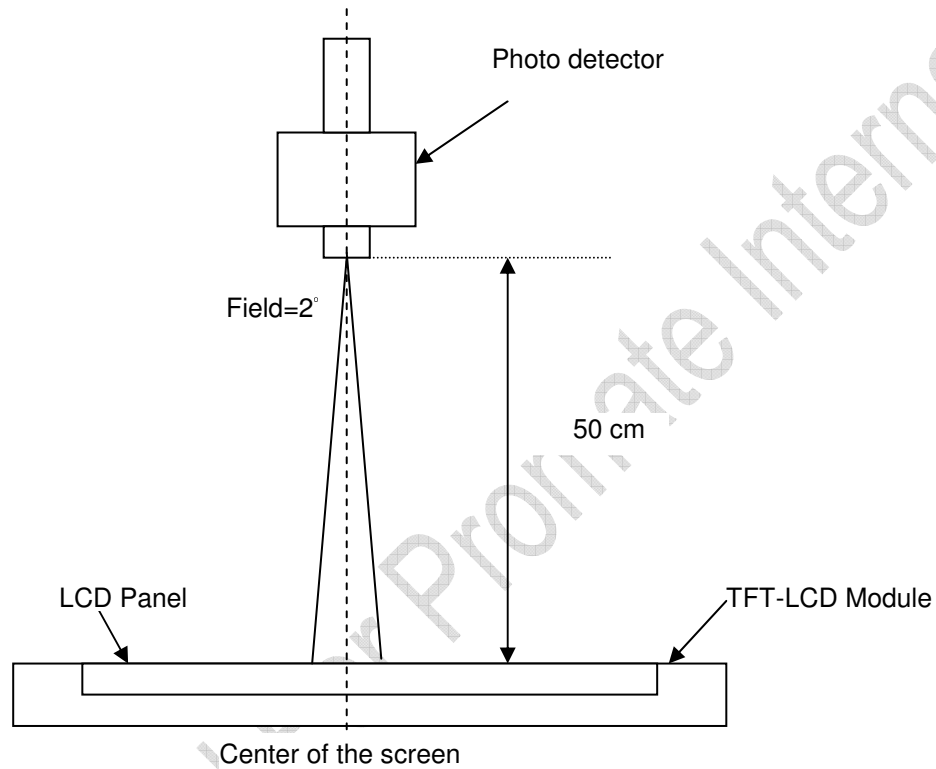


Note 5: Definition of Cross Talk (CT)

$$CT = |Y_B - Y_A| / Y_A \times 100 (\%)$$

Where


Y_A = Luminance of measured location without gray level 0 pattern (cd/m²)

Y_B = Luminance of measured location with gray level 0 pattern (cd/m²)

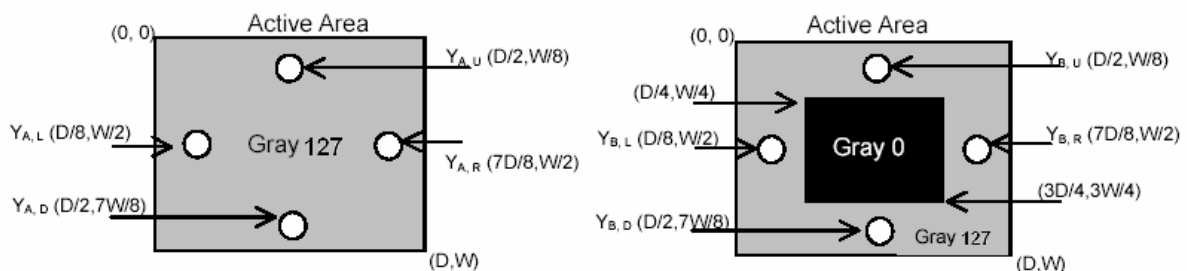


Note 6: Definition of response time:


The output signals of photo detector are measured when the input signals are changed from “Full Black” to “Full White” (rising time), and from “Full White” to “Full Black” (falling time), respectively. The response time is interval between the 10% and 90% of amplitudes. Please refer to the figure as below.

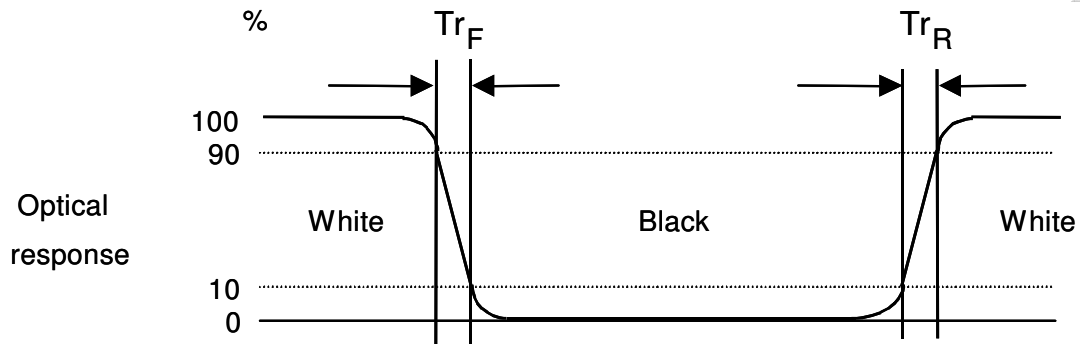

Note 7: Subchecker Pattern

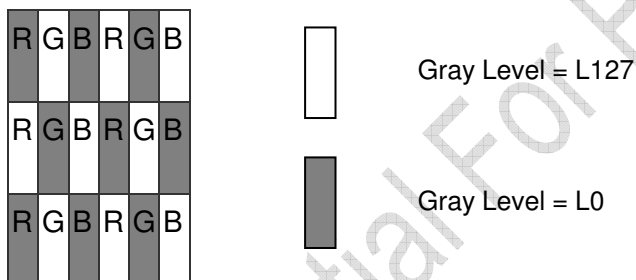


Method: Record dBV & DC value with (WESTAR)TRD-100

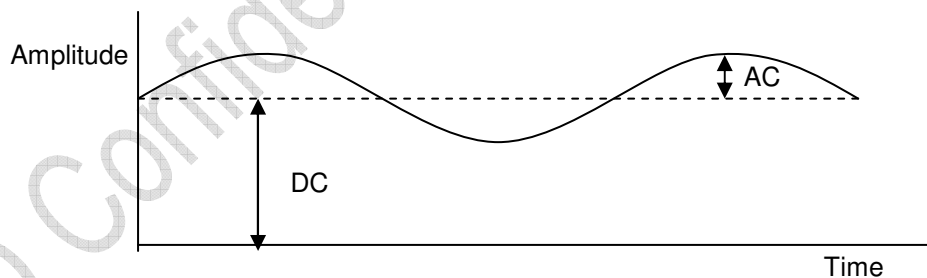

$$\text{Flicker (dB)} = 20 \log \frac{\text{AC Level(at 30 Hz)}}{\text{DC Level}}$$

3. Functional Block Diagram

The following diagram shows the functional block of the 17.0 inches Color TFT-LCD Module:

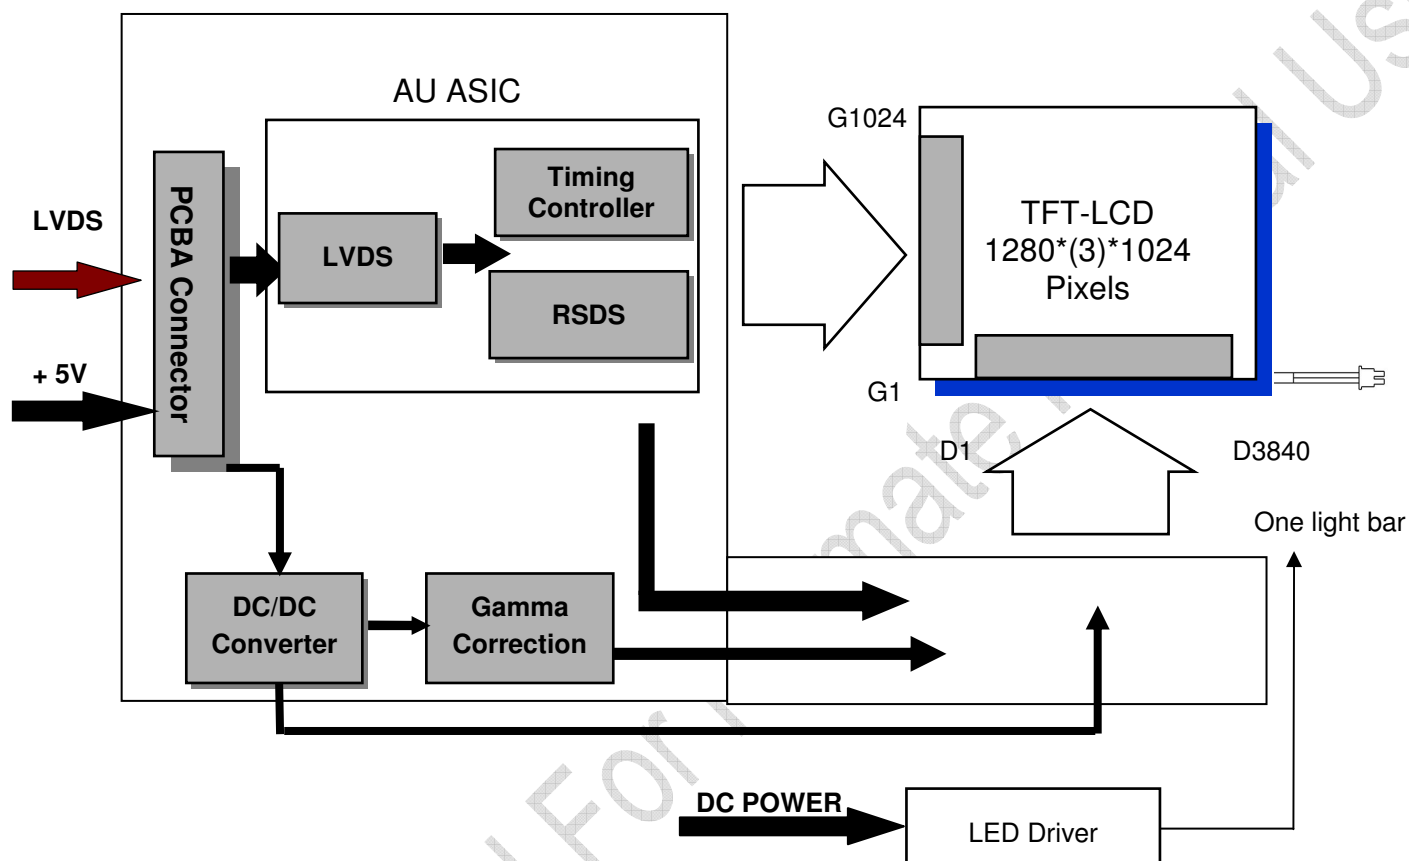

PCBA Connector:

JAE FI-XB30SSL-HF15
Or Compatible

LED Driver Connector:

3806K-F06Y-03R
Or Compatible

4. Absolute Maximum Ratings

An absolute maximum ratings of the module is as following:

4.1 TFT LCD Module

Item	Symbol	Min	Max	Unit	Conditions
Logic/LCD Drive Voltage	VDD	-0.3	+6	[Volt]	Note 1,2
Signal Voltage	RxOINi-/+, RxEINi-/+	-0.3	4	[Volt]	Note 1,2, i=0,1,2,3
Signal Voltage	RxOCLKON-/+, RxECLKIN-/+	-0.3	4	[Volt]	Note 1,2

4.2 Backlight Unit

Item	Symbol	Min	Max	Unit	Conditions
LED Forward Current	I _F	-	120	[mA]	Note 1,2

4.3 Absolute Ratings of Environment


Item	Symbol	Min	Max	Unit	Conditions
Operating Temperature	TOP	-30	+85	[°C]	Note 3
Operation Humidity	HOP	8	90	[%RH]	
Storage Temperature	TST	-30	+85	[°C]	
Storage Humidity	HST	8	90	[%RH]	

Note 1: With in Ta (25°C)

Note 2: Permanent damage to the device may occur if exceeding maximum values

Note 3: Temperature and relative humidity range are shown as the below figure.

1. 95% RH Max (Ta ≤ 39°C)
2. Max wet-bulb temperature at 39°C or less. (Ta ≤ 39°C)
3. No condensation

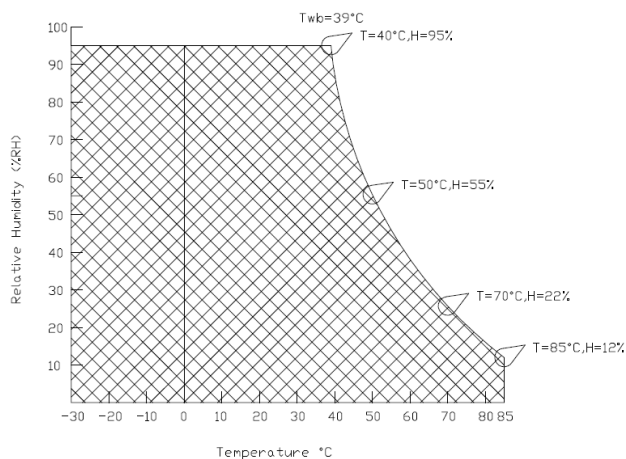

5. Electrical characteristics



5.1 TFT LCD Module

5.1.1 Power Specification

Input power specifications are as follows:

Symble	Parameter	Min.	Typ.	Max.	Unit	Condition
VDD	Logic/LCD Drive Voltage	4.5	5.0	5.5	[Volt]	±10%
IDD	Input Current	-	1.05	1.16	[A]	VDD=5V , All Black Pattern, at 75Hz
IRush	Inrush Current	-	-	3.0	[A]	Note
PDD	VDD Power	-	5.25	5.8	[Watt]	VDD=5V , All Black Pattern, at 75Hz
VDDrp	Allowable Logic/LCD Drive Ripple Voltage	-	-	200	[mV] p-p	VDD=5V , All Black Pattern, at 75Hz

Note: Measurement conditions:

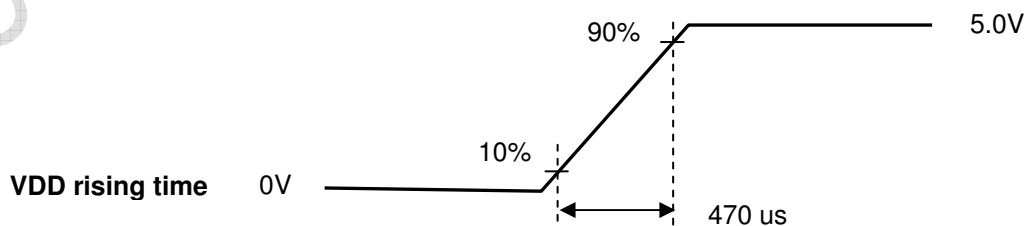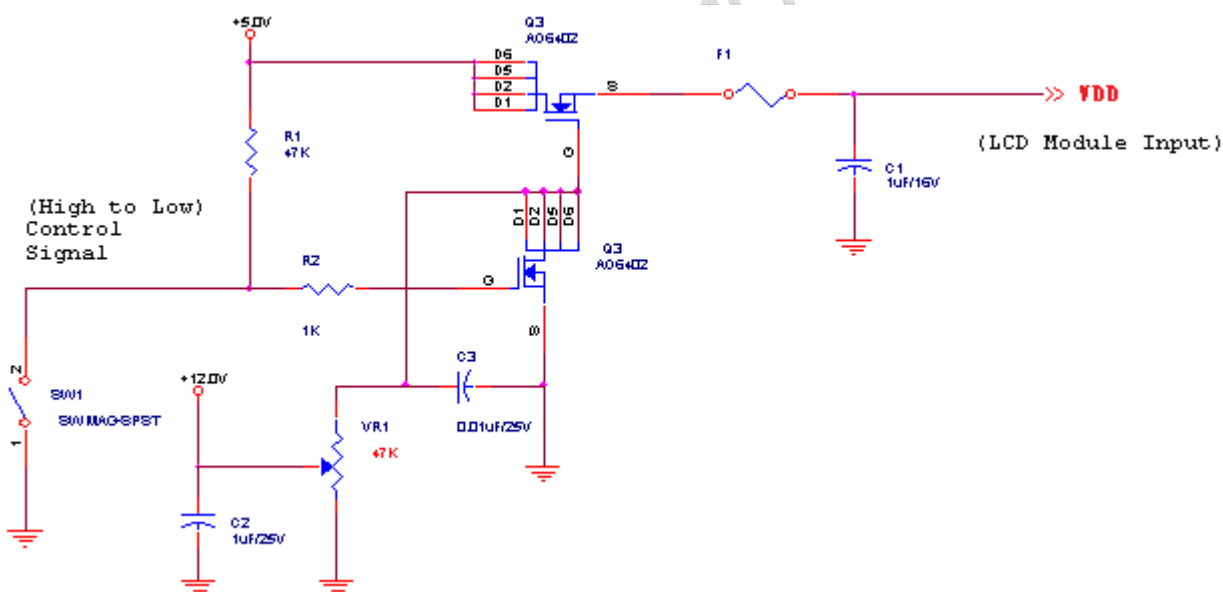

5.1.2 Signal Electrical Characteristics

Input signals shall be low or Hi-Z state when VDD is off


It is recommended to refer the specifications of SN75LVDS82DGG (Texas Instruments) in detail.

Each signal characteristics are as follows;


Symbol	Parameter	Min	Typ	Max	Units	Condition
V_{TH}	Differential Input High Threshold	-	-	+100	[mV]	$V_{CM} = 1.2V$ Note
V_{TL}	Differential Input Low Threshold	-100	-	-	[mV]	$V_{CM} = 1.2V$ Note
$ V_{ID} $	Input Differential Voltage	100	400	600	[mV]	Note
V_{CM}	Differential Input Common Mode Voltage	+1.0	+1.2	+1.5	[V]	$V_{TH}-V_{TL} = 200mV$ (max) Note

Note: LVDS Signal Waveform

Single-end Signal

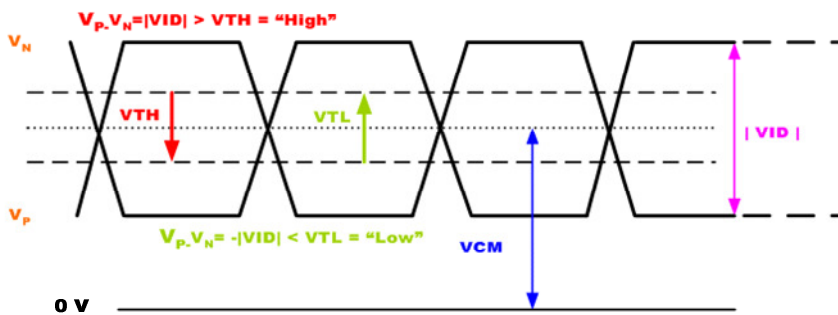

Differential Signal

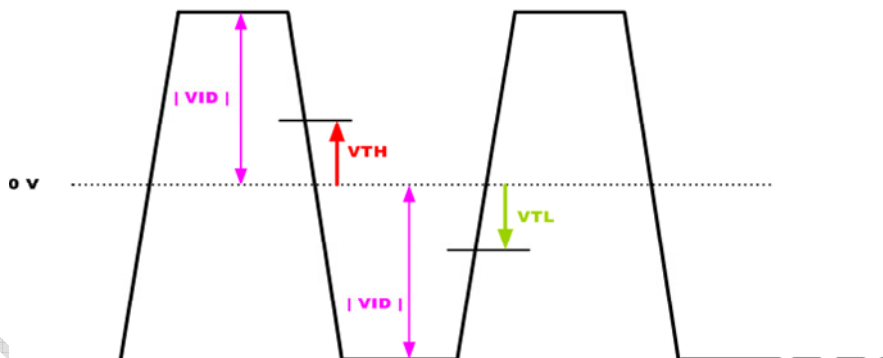

5.2 Backlight Unit

Parameter guideline LED

Following characteristics are measured under stable condition at 25°C (Room Temperature)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Remark
V_{LED}	Input Voltage	10.8	12	12.6	Volt	
I_{LED}	Input Current	-	1.18	-	A	100% Dimming
P_{LED}	Power Consumption	-	14.16	-	Watt	100% Dimming
$I_{INRUSH LED}$	Inrush Current	-	-	5.1	A	V_{LED} rising time ~ 470us
F_{PWM}	PWM Dimming Frequency	200	-	20K	Hz	Note 1,2
$V_{PWM DIM}$	Swing Voltage High	4.0	5.0	5.5	Volt	
	Swing Voltage Low	-	-	0.8	Volt	
D_{PWM}	Dimming Duty Cycle	10	-	100	%	
I_F	LED Forward Current	-	110	-	mA	$T_a = 25^{\circ}C$
$V_{LED ON/OFF}$	On Control Voltage	3.0	3.3	5.5	Volt	Note 3, 4
	Off Control Voltage	-	-	0.8	Volt	
Operating Life		50000	-	-	Hrs	Note 5, 6

Note 1: PWM dimming function can be operated by PWM signal. PWM duty cycle can adjust white Luminance.

(PWM High: ON and PWM Low: OFF)

Note 2: PWM signal can not be floating and pull-down to ground when waiting.

Note 3: Enable ($V_{LED On/Off}$) must be turned on late than V_{LED} and PWM Signal.

Note 4: Enable ($V_{LED On/Off}$) must be turned off early than V_{LED} and PWM Signal.


Note 5: If G170EG01 V1 module is driven by high current or at high ambient temperature & humidity condition. The operating life will be reduced.

Note 6: Operating life means brightness goes down to 50% initial brightness. Minimum operating life time is estimated data.


6. Signal Characteristic

6.1 Pixel Format Image

Following figure shows the relationship of the input signals and LCD pixel format.

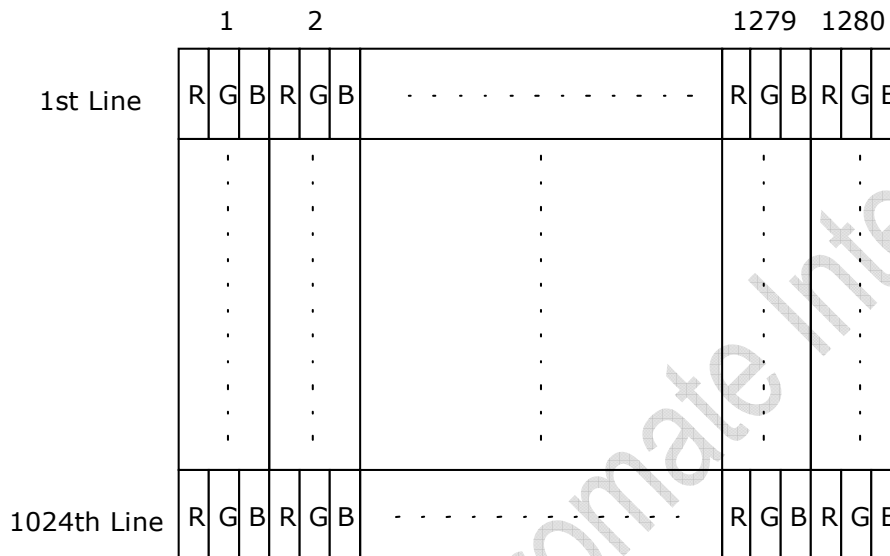

6.2 The Input Data Format

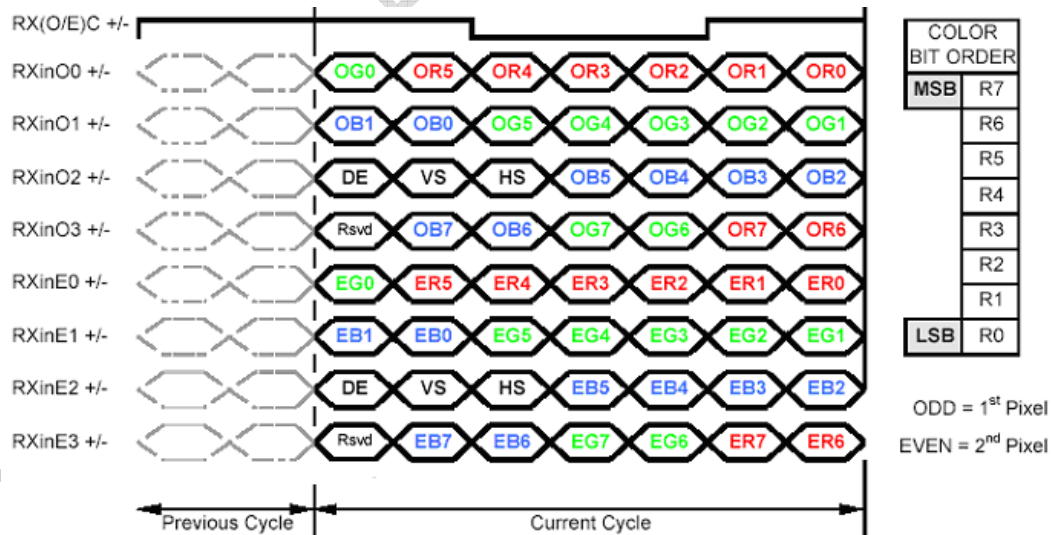

Note1: Normally, DE, VS, HS on EVEN channel are not used.

Note2: Please follow PSWG.

Note3: 8-bit in

6.3 Signal Description

The module using a pair of LVDS receiver SN75LVDS82DGG (Texas Instruments) or compatible. LVDS is a differential signal technology for LCD interface and high speed data transfer device. LVDS transmitter shall be SN75LVDS82DGG (negative edge sampling) or compatible. The first LVDS port (RxOxxx) transmits odd pixels while the second LVDS port (RxExxx) transmits even pixels.


LVDS Connector Pin Assignment (CN1)

PIN #	SIGNAL NAME	DESCRIPTION
1	RxOIN0-	Negative LVDS differential data input (Odd data)
2	RxOIN0+	Positive LVDS differential data input (Odd data)
3	RxOIN1-	Negative LVDS differential data input (Odd data)
4	RxOIN1+	Positive LVDS differential data input (Odd data)
5	RxOIN2-	Negative LVDS differential data input (Odd data, H-Sync,V-Sync,DSPTMG)
6	RxOIN2+	Positive LVDS differential data input (Odd data, H-Sync,V-Sync,DSPTMG)
7	GND	Power Ground
8	RxOCLKIN-	Negative LVDS differential clock input (Odd clock)
9	RxOCLKIN+	Positive LVDS differential clock input (Odd clock)
10	RxOIN3-	Negative LVDS differential data input (Odd data)
11	RxOIN3+	Positive LVDS differential data input (Odd data)
12	RxEIN0-	Negative LVDS differential data input (Even data)
13	RxEIN0+	Positive LVDS differential data input (Even data)
14	GND	Power Ground
15	RxEIN1-	Negative LVDS differential data input (Even data)
16	RxEIN1+	Positive LVDS differential data input (Even data)
17	GND	Power Ground
18	RxEIN2-	Negative LVDS differential data input (Even data)
19	RxEIN2+	Positive LVDS differential data input (Even data)
20	RxECLKIN-	Negative LVDS differential clock input (Even clock)
21	RxECLKIN+	Positive LVDS differential clock input (Even clock)
22	RxEIN3-	Negative LVDS differential data input (Even data)
23	RxEIN3+	Positive LVDS differential data input (Even data)
24	GND	Power Ground
25	GND (AGMODE+HVS)	Power Ground (For AUO test Aging+HVS mode)
26	GND	Power Ground
27	GND	Power Ground
28	VDD	+5.0V Power Supply
29	VDD	+5.0V Power Supply
30	VDD	+5.0V Power Supply


LED Driver Connector Pin Assignment (CN2)

Pin#	Symbol	Signal Name
1	V_{LED}	12V
2	V_{LED}	12V
3	GND	GND
4	GND	GND
5	Display on	5V-On / 0V-Off
6	Dimming	PWM Dimming


Note1: Start from left side

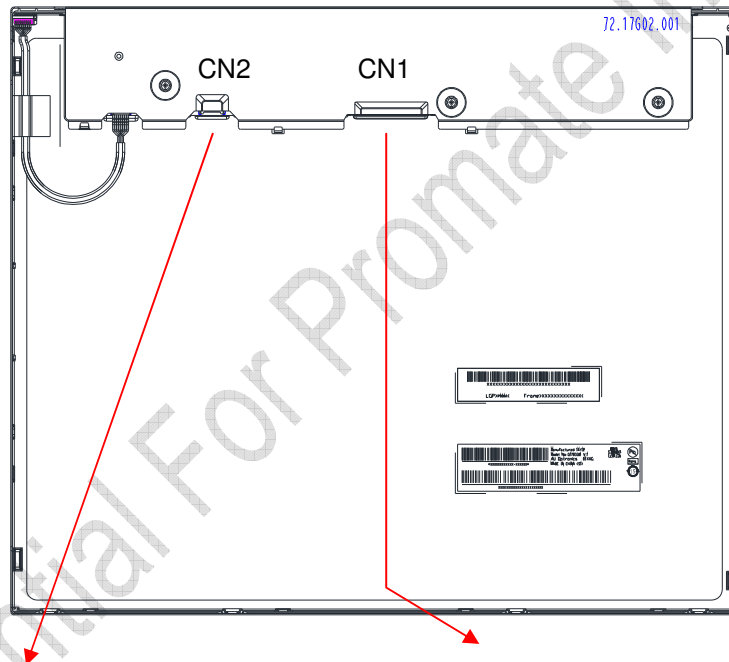

LED Driver Connector (CN2)

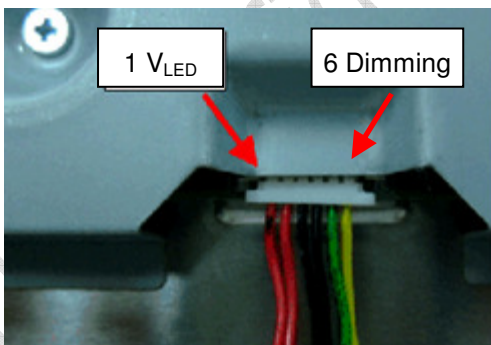

LVDS Connector (CN1)

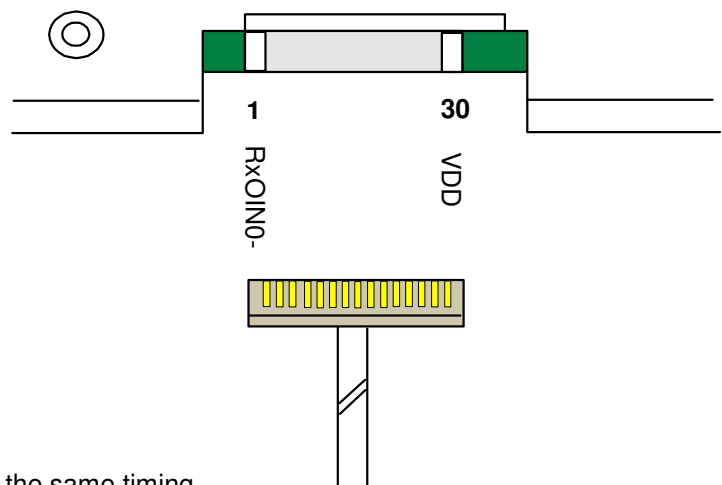

Note2: Input signals of odd and even clock shall be the same timing.

Note3: Please follow PSWG.

6.4 Timing Characteristics


6.4.1 Timing Characteristics

Basically, interface timings described here is not actual input timing of LCD module but output timing of SN75LVDS82DGG (Texas Instruments) or equivalent.

Signal	Item	Symbol	Min	Typ	Max	Unit
Vertical Section	Period	T_v	1034	1066	1150	Th
	Active	$T_{disp(v)}$	1024	1024	1024	Th
	Blanking	$T_{bp(v)}+T_{fp(v)}+PW_{vs}$	10	42	126	Th
Horizontal Section	Period	T_h	750	844	2048	Tclk
	Active	$T_{disp(h)}$	640	640	640	Tclk
	Blanking	$T_{bp(h)}+T_{fp(h)}+PW_{hs}$	110	204	-	Tclk
Clock	Period	T_{clk}	14.81	18.52	25	ns
	Frequency	Freq	40	54	70	MHz
Frame rate	Frame rate	F	49	60	76	Hz


Note : DE mode only

6.4.2 Timing Diagram

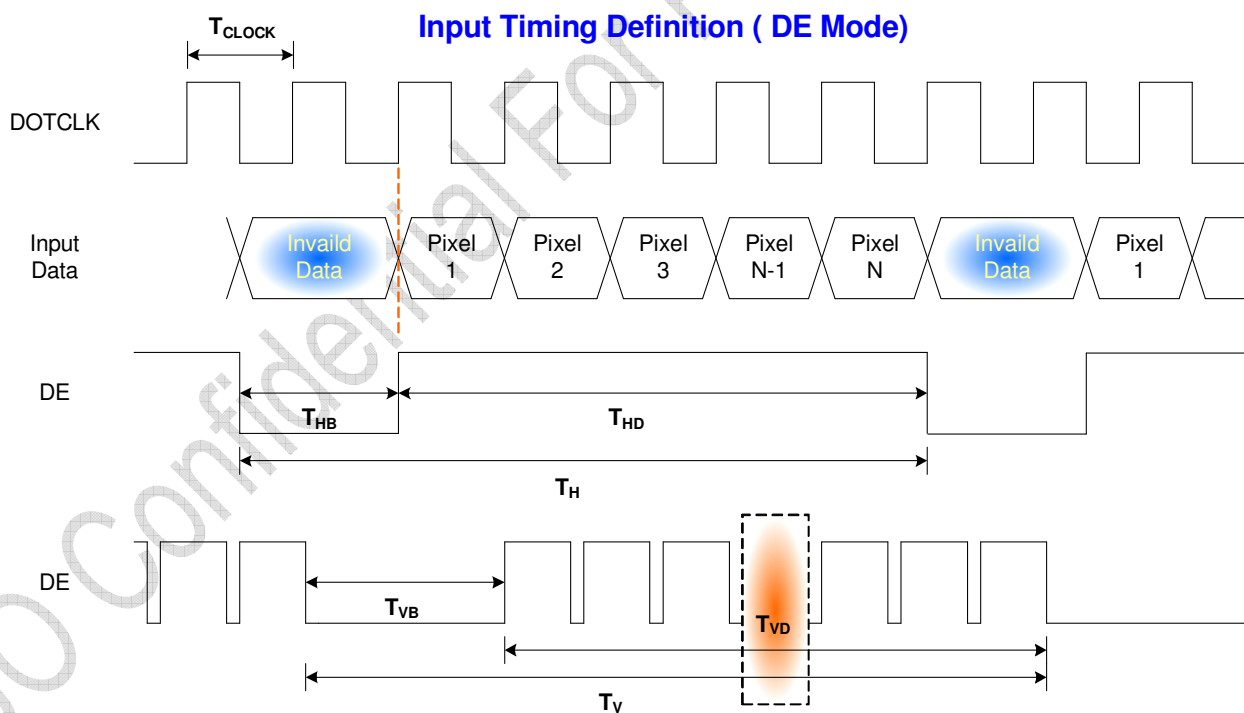

6.5 Power ON/OFF Sequence

VDD power and lamp on/off sequence is as follows. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off.

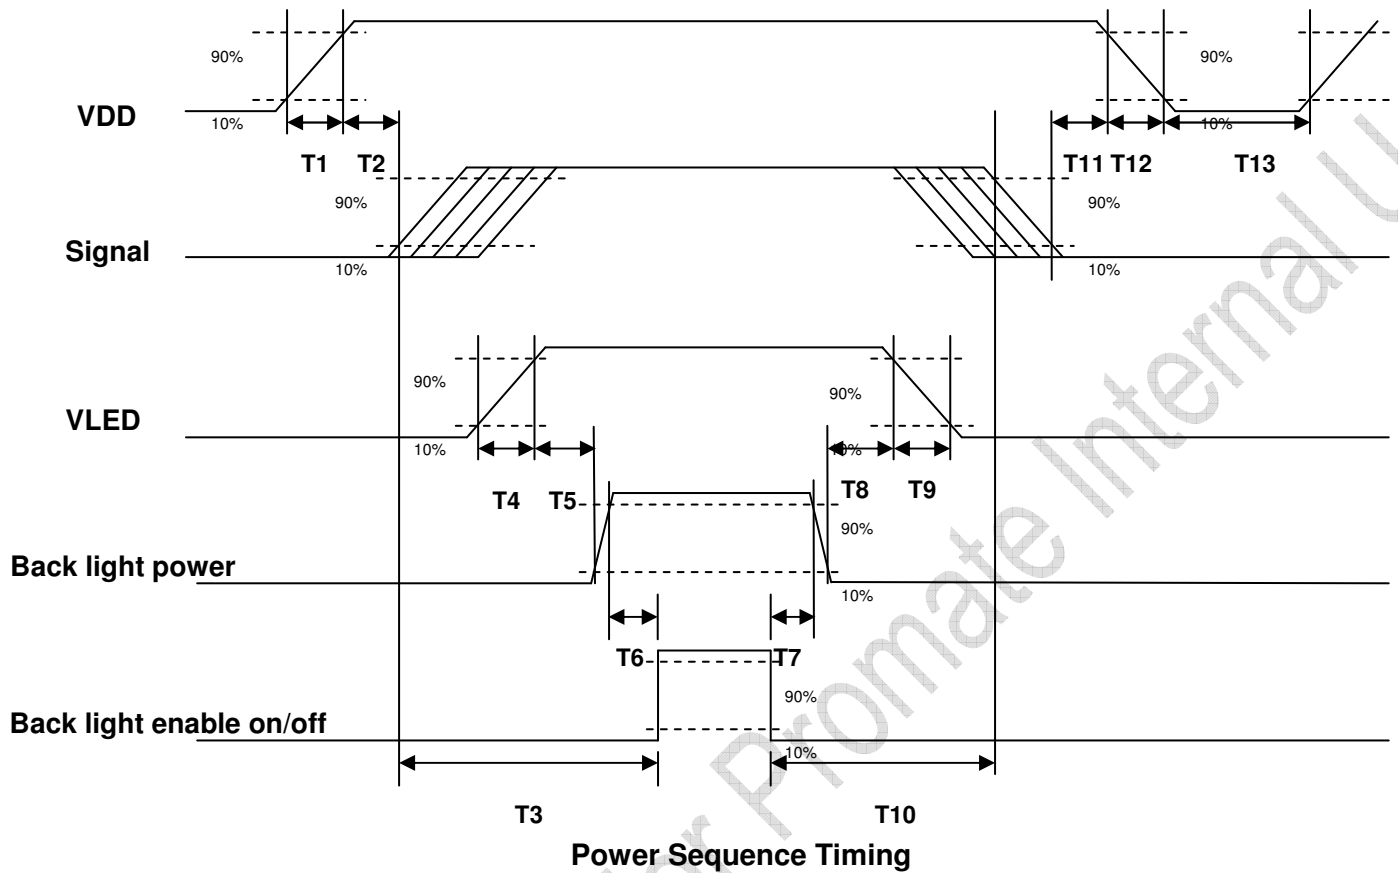

Parameter	Value			Unit
	Min.	Typ.	Max.	
T1	0.5	-	10	[ms]
T2	30	40	50	[ms]
T3	200	-	-	[ms]
T4	0.5	-	10	[ms]
T5	10	-	-	[ms]
T6	10	-	-	[ms]
T7	0	-	-	[ms]
T8	10	-	-	[ms]
T9	-	-	10	[ms]
T10	110	-	-	[ms]
T11	0	16	50	[ms]
T12	-	-	10	[ms]
T13	1000	-	-	[ms]

7. Connector & Pin Assignment

Physical interface is described as for the connector on module. These connectors are capable of accommodating the following signals and will be following components.

7.1 TFT LCD Module

7.1.1 Connector

Connector Name / Designation	Interface Connector
Manufacturer	JAE or Compatible
Type Part Number	FI-XB30SSL-HF15 or Compatible
Mating Housing Part Number	JAE FI-X30HL or Compatible

7.1.2 LVDS Pin Assignment (CN1)

Pin#	Signal Name	Pin#	Signal Name
1	RxOIN0-	2	RxOIN0+
3	RxOIN1-	4	RxOIN1+
5	RxOIN2-	6	RxOIN2+
7	GND	8	RxOCLKIN-
9	RxOCLKIN+	10	RxOIN3-
11	RxOIN3+	12	RxEIN0-
13	RxEIN0+	14	GND
15	RxEIN1-	16	RxEIN1+
17	GND	18	RxEIN2-
19	RxEIN2+	20	RxECLKIN-
21	RxECLKIN+	22	RxEIN3-
23	RxEIN3+	24	GND
25	GND (AGMODE+HVS)	26	GND
27	GND	28	VDD
29	VDD	30	VDD

7.2 Backlight Unit

Physical interface is described as for the connector on module. These connectors are capable of accommodating the following signals and will be following components.

Connector Name / Designation	Lamp Connector
Manufacturer	E&T or compatible
Connector Model Number	3806K-F06Y-03R or compatible
Mating Connector Model Number	H208K-P06N-02B or compatible

7.2.1 Signal for LED driver connector (CN2)

Pin#	Symbol	Signal Name
1	V _{LED}	12V
2	V _{LED}	12V
3	GND	GND
4	GND	GND
5	Display on	5V-On / 0V-Off
6	Dimming	PWM Dimming

8. Reliability Test

Environment test conditions are listed as following table.

Items	Required Condition	Note
Temperature Humidity Bias (THB)	Ta= 50°C, 80%RH, 300hours	
High Temperature Operation (HTO)	Ta= 85°C, 300hours	
Low Temperature Operation (LTO)	Ta= -30°C, 300hours	
High Temperature Storage (HTS)	Ta= 85°C, 300hours	
Low Temperature Storage (LTS)	Ta= -30°C, 300hours	
Vibration Test (Non-operation)	Acceleration: 1.5 G Wave: Random Frequency: 10 - 200 - 10 Hz Sweep: 30 Minutes each Axis (X, Y, Z)	
Shock Test (Non-operation)	Acceleration: 50 G Wave: Half-sine Active Time: 20 ms Direction: ±X, ±Y, ±Z (one time for each Axis)	
Drop Test	Height: 60 cm, package test	
Thermal Shock Test (TST)	-20°C/30min, 60°C/30min, 100 cycles	
On/Off Test	On/10sec, Off/10sec, 30,000 cycles	
ESD	Contact Discharge: ± 8KV, 150pF(330Ω) 1sec, 8 points, 25 times/ point.	1
	Air Discharge: ± 15KV, 150pF(330Ω) 1sec 8 points, 25 times/ point.	
EMI	30-230 MHz, limit 40 dBu V/m, 230-1000 MHz, limit 47 dBu V/m	
Altitude Test	Operation:10,000 ft Non-Operation:30,000 ft	

Note1: According to EN61000-4-2, ESD class B: Some performance degradation allowed. No data lost
Self-recoverable. No hardware failures.


Note2:

- Water condensation is not allowed for each test items.
- Each test is done by new TFT-LCD module. Don't use the same TFT-LCD module repeatedly for reliability test.
- The reliability test is performed only to examine the TFT-LCD module capability.
- To inspect TFT-LCD module after reliability test, please store it at room temperature and room humidity for 24 hours at least in advance.
- No function failure occurs.


9. Label and Packaging

9.1 Shipping Label (on the rear side of TFT-LCD display)

The shipping label format is shown as below.








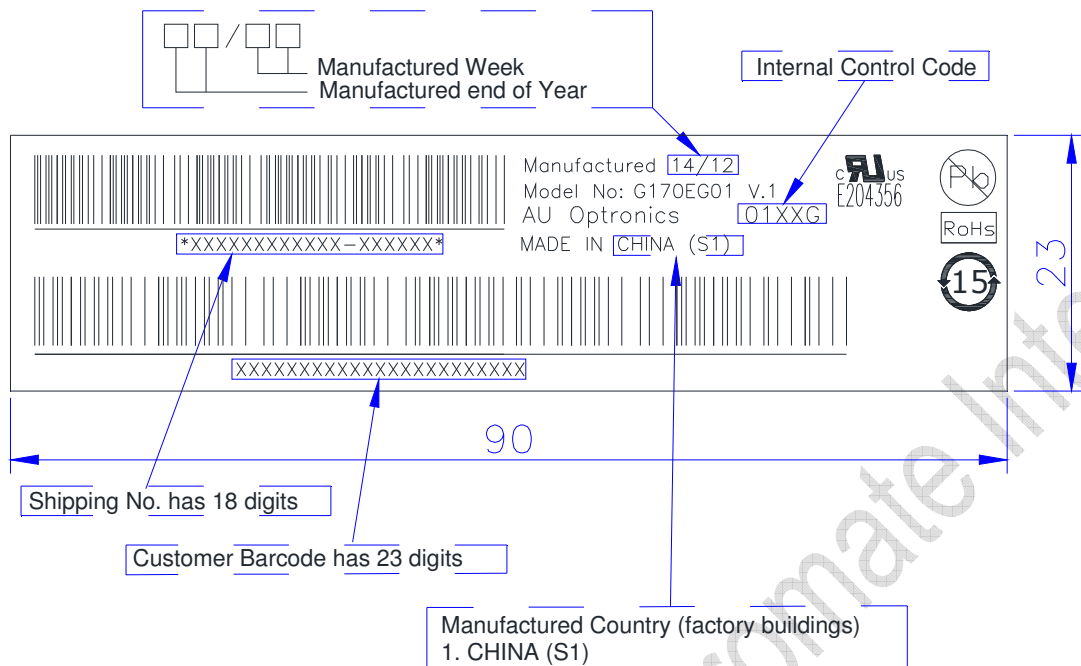


9.2 Backlight Label

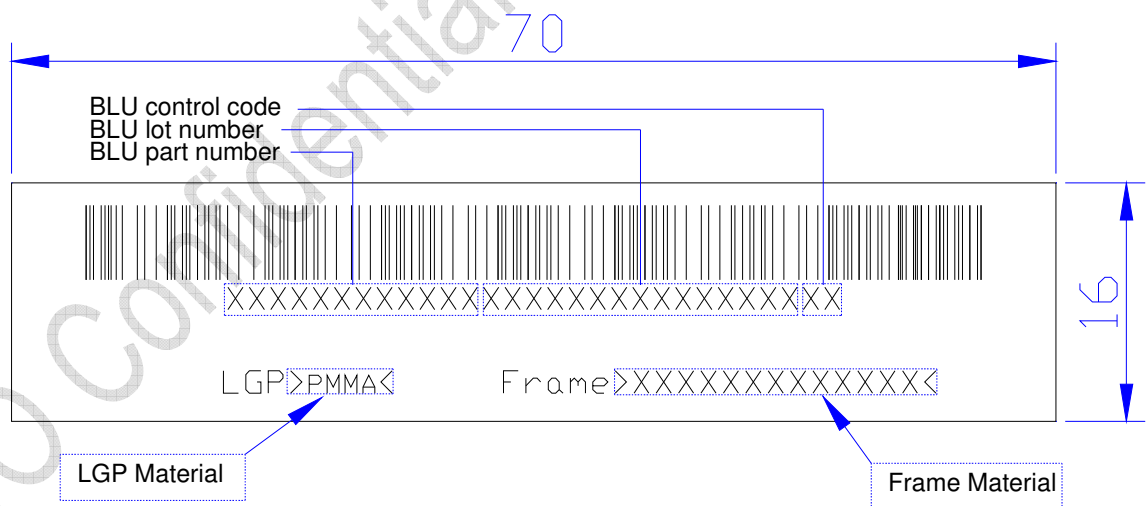


9.3 Carton Package

- Max capacity : 8 TFT-LCD module per carton
- Max weight: 18 kg per carton
- Outside dimension of carton:434(L)mm*278(W)mm*391(H)mm

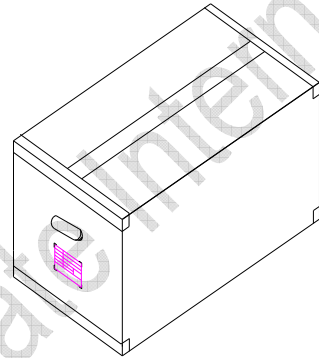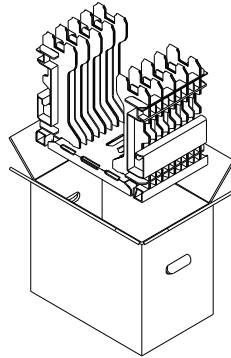


9.4 Palletizing


	MAX SHIPPING BY AIR	MAX SHIPPING BY SEA	MAX SHIPPING BY SEA_HQ
MODULE/CARTON	8	8	7
CARTON/LAYER	8	8	8
LAYER/PALLET		3+1	3+2
MODULE/PALLET	192	256	280
CARTON SIZE(MM)	434(L)*278(W)*391(H)	434(L)*278(W)*391(H)	434(L)*278(W)*391(H)
PALLET SIZE(MM)	1140(L)*890(W)*135(H)	1140(L)*890(W)*135(H)	1140(L)*890(W)*135(H)
TOTAL PALLET HEIGHT(MM)	1308	1834	2258
TOTAL PALLET WEIGHT(KG)	445	602	746

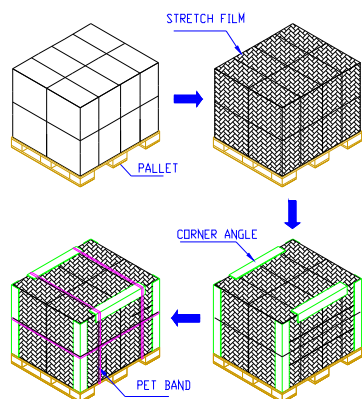



ONE PALLET SHIPMENT EXAMPLE
SHIPPING BY AIR USED

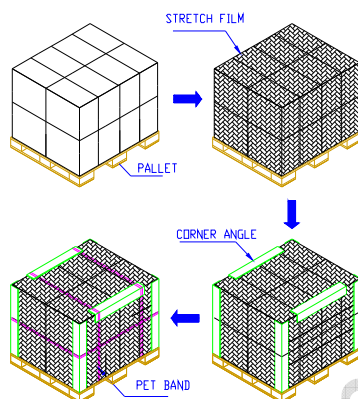

TWO PALLETS SHIPMENT EXAMPLE
SHIPPING BY SEA USED

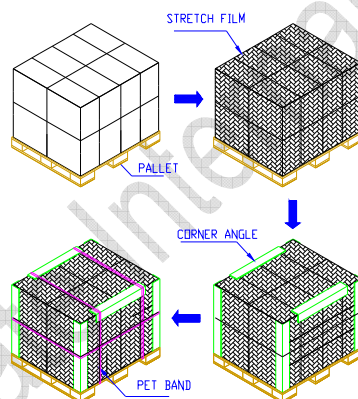

TWO PALLETS SHIPMENT EXAMPLE
SHIPPING BY SEA HQ USED

[illegible]

10. Mechanical Characteristics

